


Portable insect light trap

Description and service instructions

• **Portable, automatically working insect trap. Simple, intuitive mounting and dismounting. Original design elements.**

• After mounting passive parts of the trap [collecting vessel (1), funnel (2) and barriers from plexiglass (3)], it is necessary to connect fluorescent lamp (not included) with box with electronics (4) using jumper cable (5) and connectors and fix the connection by fine drawing up the screw. Connection to the power source (12V battery, not included) is done with crocodile clips (red = +, blue = -) with protection against changing poles: when right connection, the green diode is switched on, when bad connection, the red diode is switched on – in this case, it is necessary to correct the connection. The trap is switched on at the dusk and automatically switched off at daybreak by light dimmer. When using a well-charged 12V battery with capacity of 7Ah, the trap lasts lighting up to 10 hours. The trap is fully working when raining as well, the box with electronics is waterproof, rain water is continuously drained from the trap by funnel (7).

• **When mounting or dismounting, do not use brute force!**
• **Box with electronics not to expose to direct sunlight!**

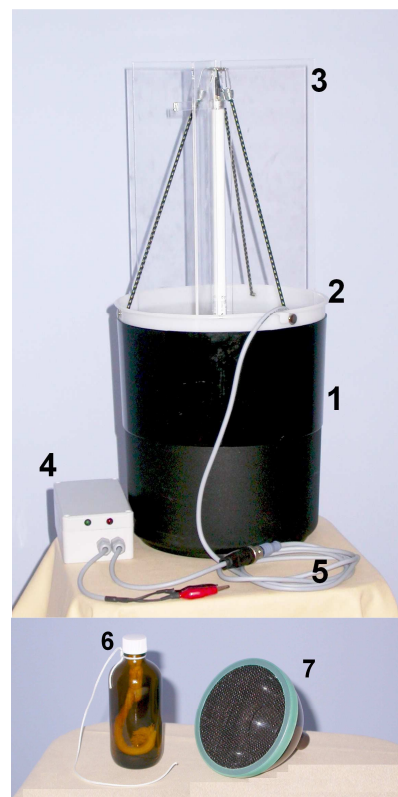

Content of the supply

- 1 collecting vessel
- 2 funnel Ø 25 cm
- 3 barriers from plexiglass
- 4 box with electronics (converter, photocell, the protection against changing poles)
- 5 jumper cables
- 6 flacon with wick (on chloroform)
- 7 funnel with net

Technical parameters

<u>Title</u>	<u>Description</u>
Rated power	8 W
Rated current	0,65 A
Voltage	12 V

Order

ENTOMOLOGICAL SERVICE
Ing. Jan Šumpich
582 61 Česká Bělá 212
Czech Republic

jansumpich@seznam.cz
www.EntomologicalService.com

monitoring – mapping – faunistics